

SLI47

High Brightness LED Spot Light



- Aii** Replaces the SL6404
- Aii** High intensity illumination from a long distance.
- Aii** Compact design includes passive thermal management and convenient M4 nut channel for mounting

Ordering Information

Stock Product: Shipped Next Day

Standard Product Variation: Shipped Within Two Weeks

SLI47-WHIIC

Configured for use with user supplied 24v regulated power supply.

Optimal working distance:

152.4mm (6") - 609.6mm (24")

	Lens Option ^	Spectral wavelength	Optional Power Compatibility	Wash Down Option	Optional Light Conditioning	Alternative Connector
SLI47	X	-	XXX	XX	X	XXX
	M (blue)	470	IC	W	D° (Diffuser)	M12* (i3: 5-pin male; IC: 4-pin male)
	W (green)	530	i3		P° (Polarizer)	
	(amber)	590	C2			
	(red)	625	C3			
	infrared	850	C5			
	(white)	WHI	△			

^ Leave blank for Standard, Narrow (N) Lens

IC = iCS (requires 24v power supply)

i3 = Combined continuous-on and strobe over-drive (24 volt PS required.)

C2 = Ai Connector

C3 = Pulsar 710 Connector

C5 = Pulsar 320 Connector


★ Available with IC and i3 options only

° Not available in combination with Wash Down Option

△ Available with Medium and Narrow lens options only

Dimensional Information

[Click for Installation Models & Drawings](#)

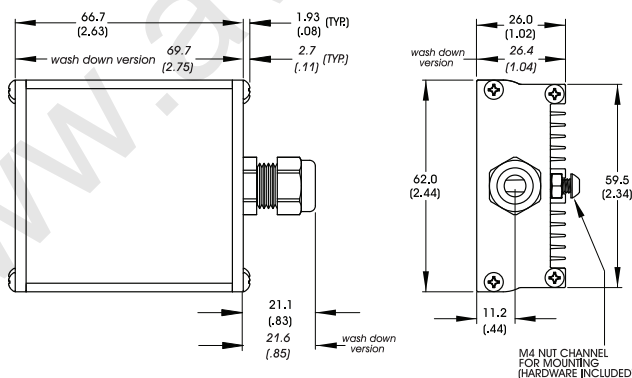

STANDARD CABLE LENGTH: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	amber	red	infra-red	white	
@24	350	350	350	350	350	350	mA

General Specifications

Weight: 122.5 g (4.4 oz)
Finish: Black Anodized

Operating Temperature: 0-60 C°
Meets Specifications:

advancedillumination.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101